



SKYPE[®]
TILE LLP.

AN ESSENTIAL
FEATURE




THREED
COLLECTION

www.skypetile.com



"WE DON'T WAIT
FOR THE FUTURE.
WE BUILD IT."

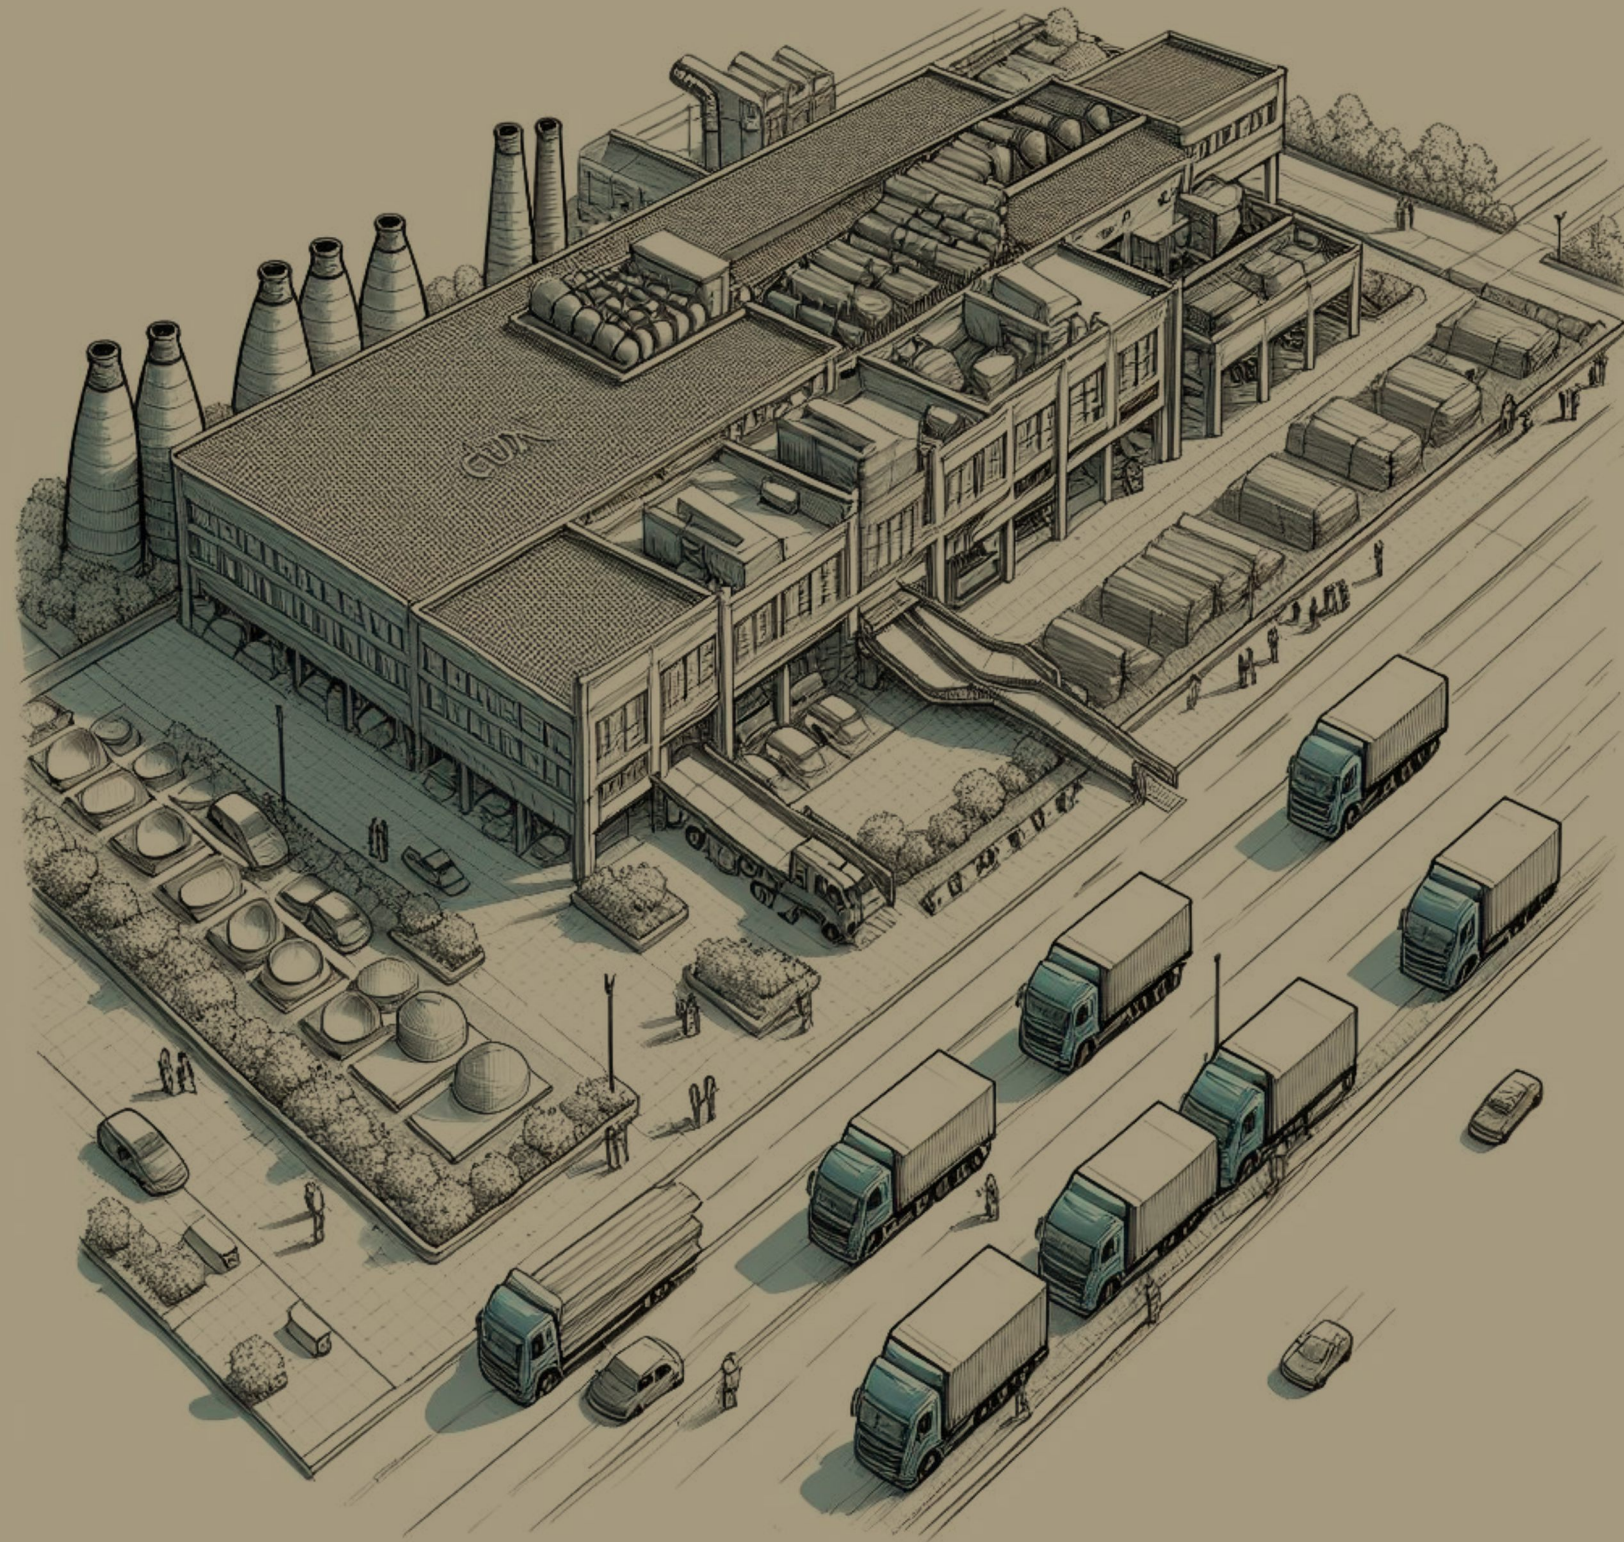

INNOVATING WITH INTEGRITY, LEADING WITH PURPOSE.

Skype Tile is the world's leading brand in vitrified tiles. A revolutionary architectural surface with premium Technical features. At Skype we never stop evolving, Researching and developing new technologies Because our objectives are clear, to be the leading Brand in bringing unique spaces to life.



Largest Production Unit Of India
40,000 Box / Day



We Have **700+** Unique Tiles
Design In Our Display.



We Are Connected With
55+ Countries' Dealers.



100% **Eco Labeling**
Production System Plant.

| DESIGN INSPIRATION



ELEVATE YOUR
SPACE TO NEW
HEIGHTS WITH THE
CONTEMPORARY
ELEGANCE

SKYPE TILE




DESIGN INSPIRATION

The tiles design is a stunning homage to the beauty of nature, each pattern
And texture intricately crafted to evoke the organic elements found in the
Natural world. With hues reminiscent of earthy tones, serene blues, and
Vibrant greens, the tiles transport the observer to tranquil forests, tranquil
Beaches, or lush gardens. From the gentle swirls mimicking the flow of water
To the intricate leaf motifs, every detail reflects the harmony and balance
Found in nature's creations. Whether its indoor spaces or outdoor spaces, it
Creating a serene and inviting ambiance that celebrates the timeless
Elegance of the natural world.

DISCOVER THE
PERFECT BLEND OF STYLE
AND FUNCTIONALITY



SKYPE TILE

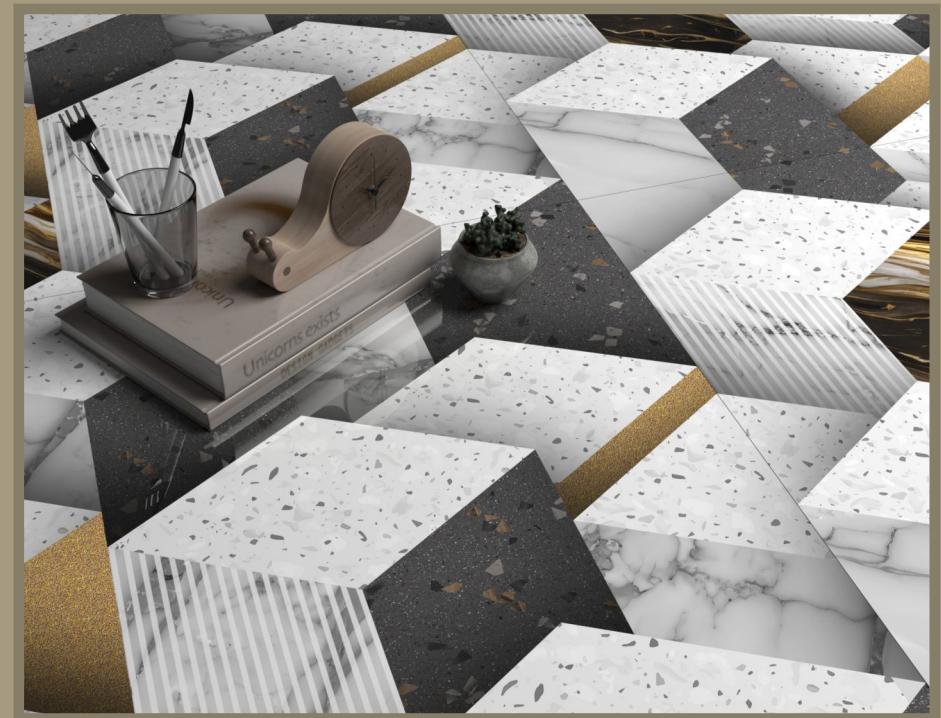

I PRODUCT PROPERTIES



I COMPACTNESS

Porcelain stoneware has Compact, non-porous Surfaces. This characteristic Makes the material highly Safe, hygienic and ideal for Food contact.

I HYGENIC

Porcelain stoneware are Nsf-certified for direct food Contact and are therefore Ideal for safe use in both Domestic and restaurant Settings.

I STRENGTH

Porcelain stoneware has Excellent strength and surface Hardness make the surfaces Resistant to wear, scratches And almost all physical and Mechanical stresses.

I STABILITY


The chemical-physical Stability of porcelain Stoneware makes it a Material resistant to Chemicals, not prone to Color changes.

I TECH-MARBLE

Thanks to advanced production Technology, skype tiles are allow The reproduction of any colour, Texture, pattern or textural effect Guaranteeing extraordinary Aesthetic versatility.

SKYPE TILE



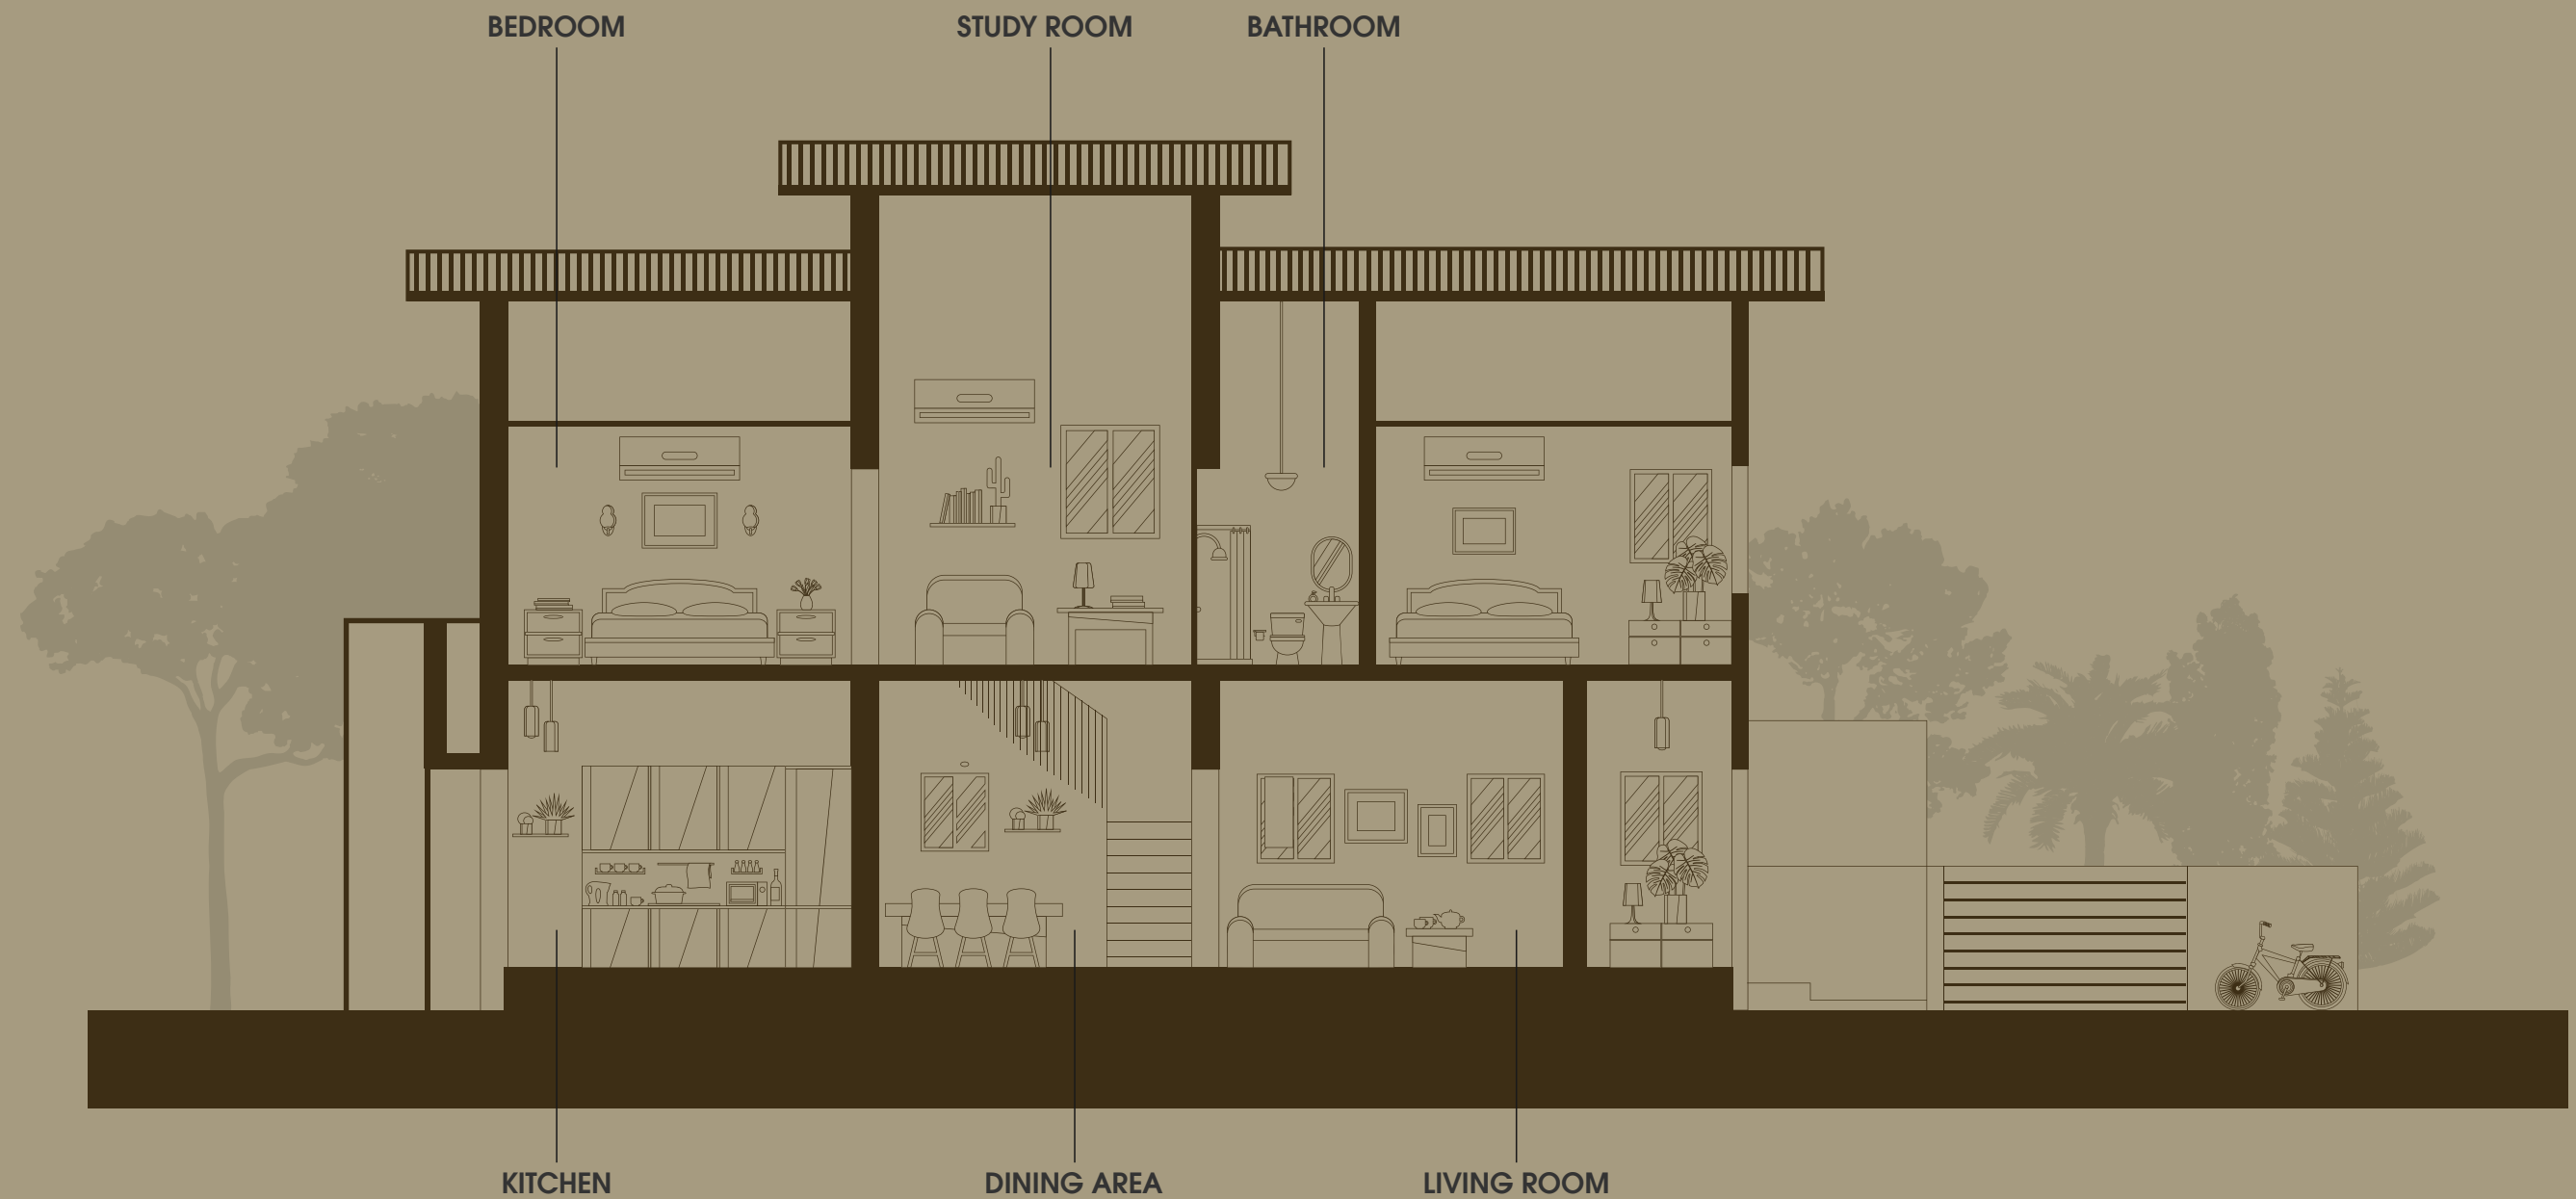

EVERY SPACE TELLS A STORY,
LET TILES BE YOUR NARRATOR.

It's A Clickable Catalogue




Tap To Explore Each Product

Tap on particular product to Explore full size view.



Tap To Back To Index Page

Again tap on the Tiles Page To return to the Index page

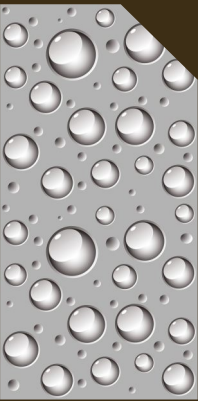

1601




1614



1615



1616

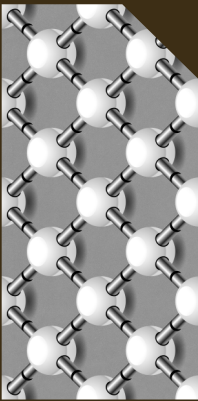


1617




1618



1619

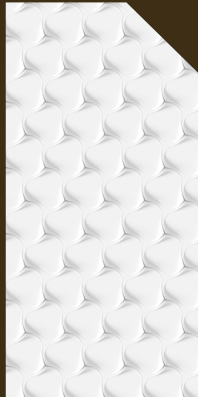

1602

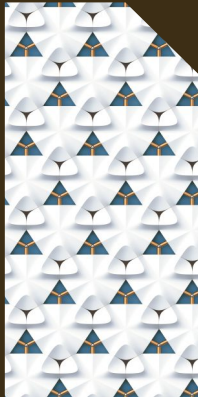

1603



1604



1605



1606




1607



1620



1621

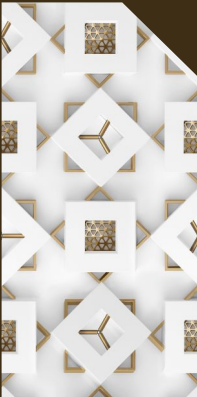

1622



1623



1624



1625



1608



1609




1610




1611



1616

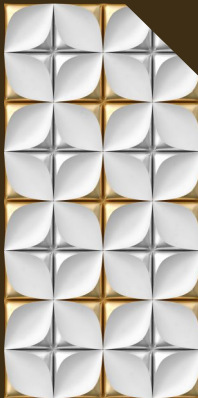


1613

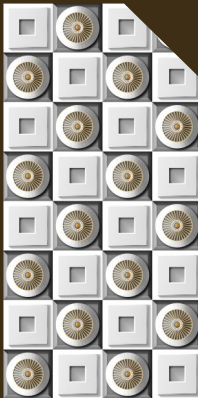

1626




1627

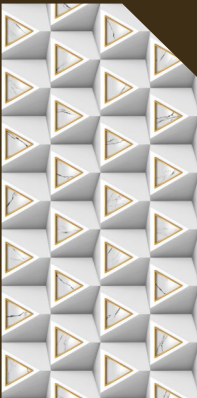

1628




1629

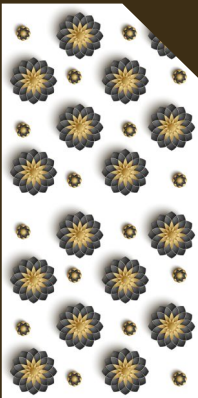

1630



1631

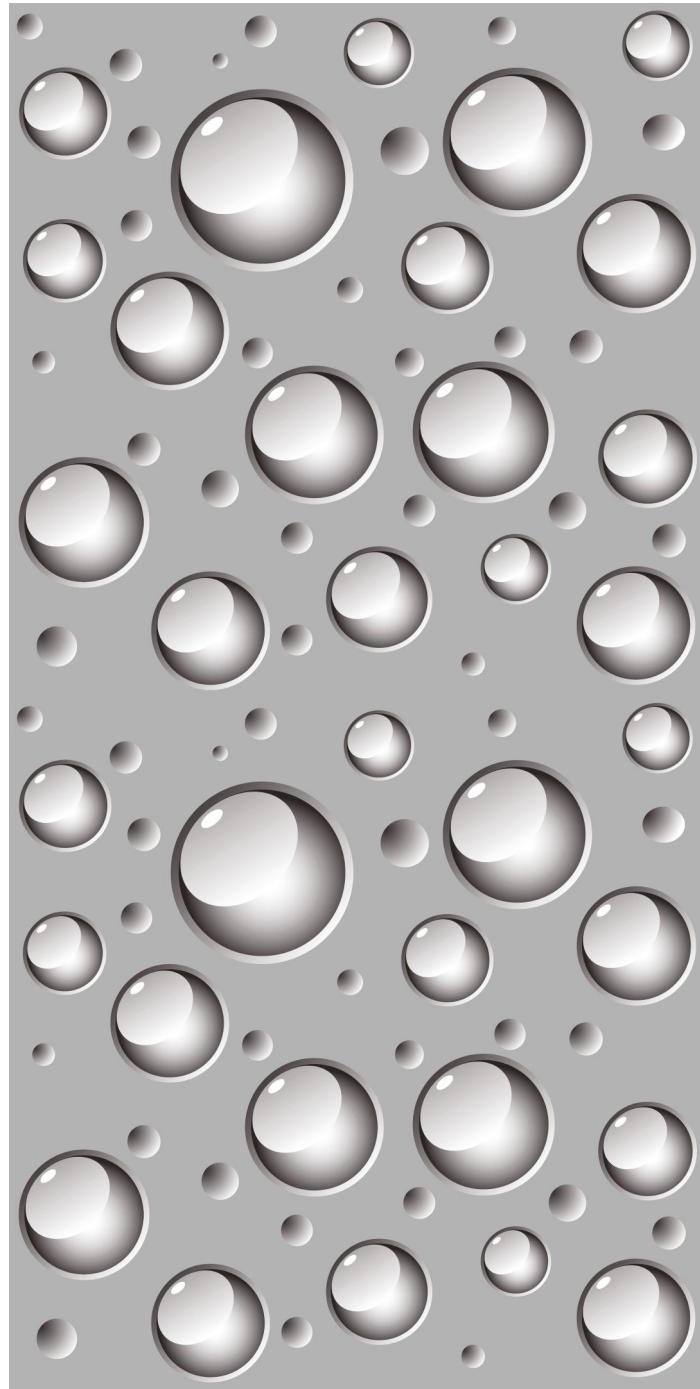


TILES IN FRAME :
1601

SURFACE :
POLISHED

COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM

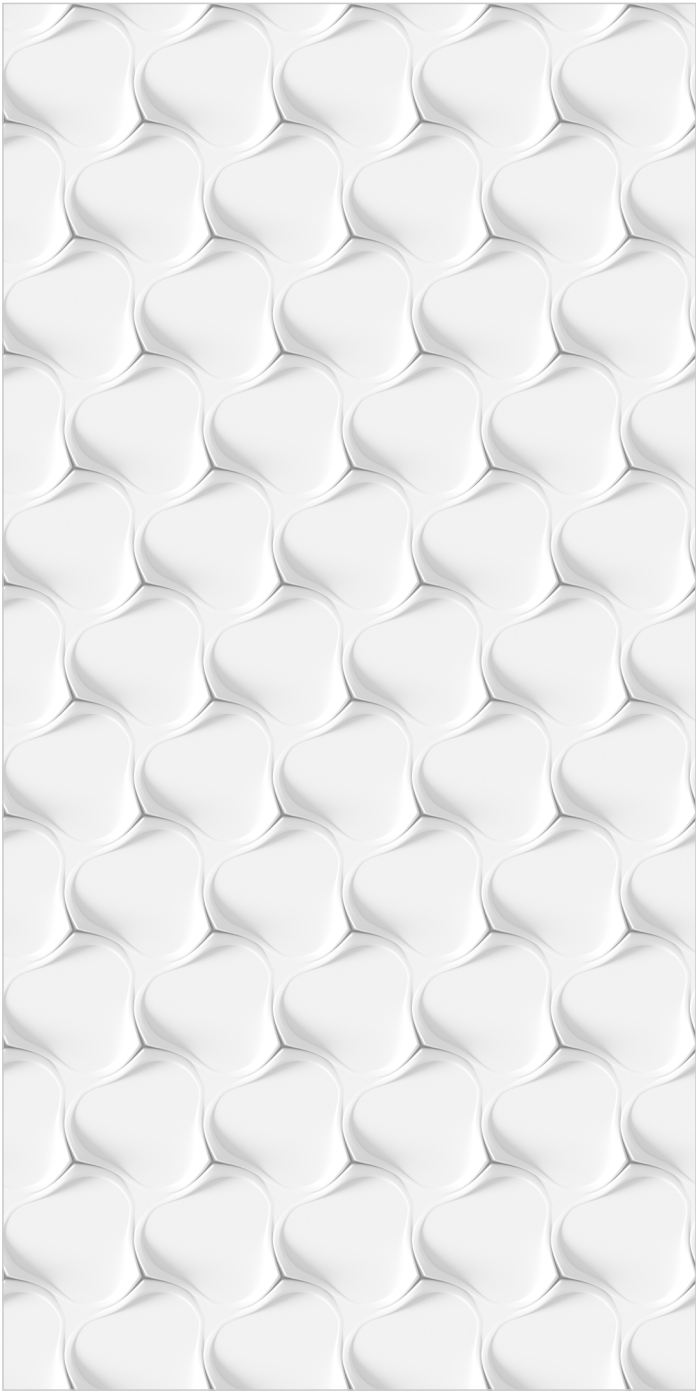


TILES IN FRAME :
1602

SURFACE :
POLISHED

COMPOSITION :
1 PCS.



DIMENSION :
600X1200MM
60X120CM

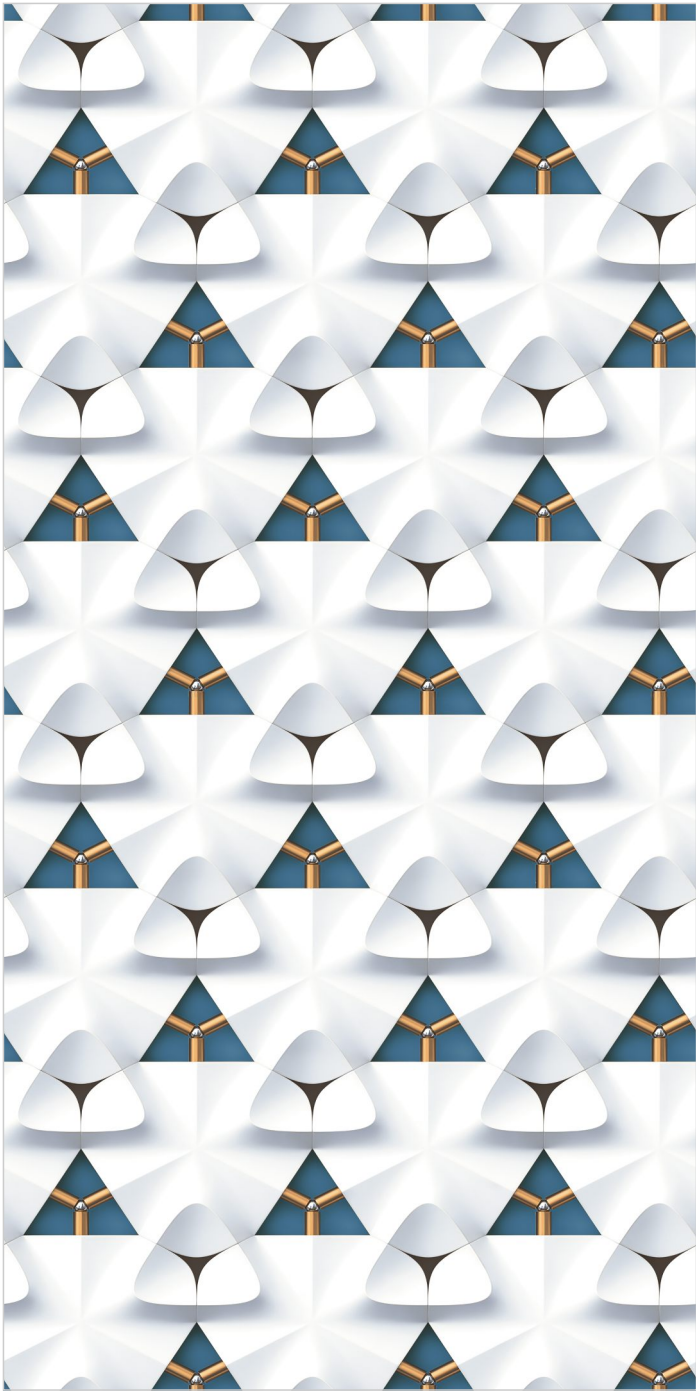

TILES IN FRAME :
1603

SURFACE :
POLISHED

COMPOSITION :
1 PCS.



DIMENSION :
600X1200MM
60X120CM






TILES IN FRAME :
1604
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



THREED
COLLECTION



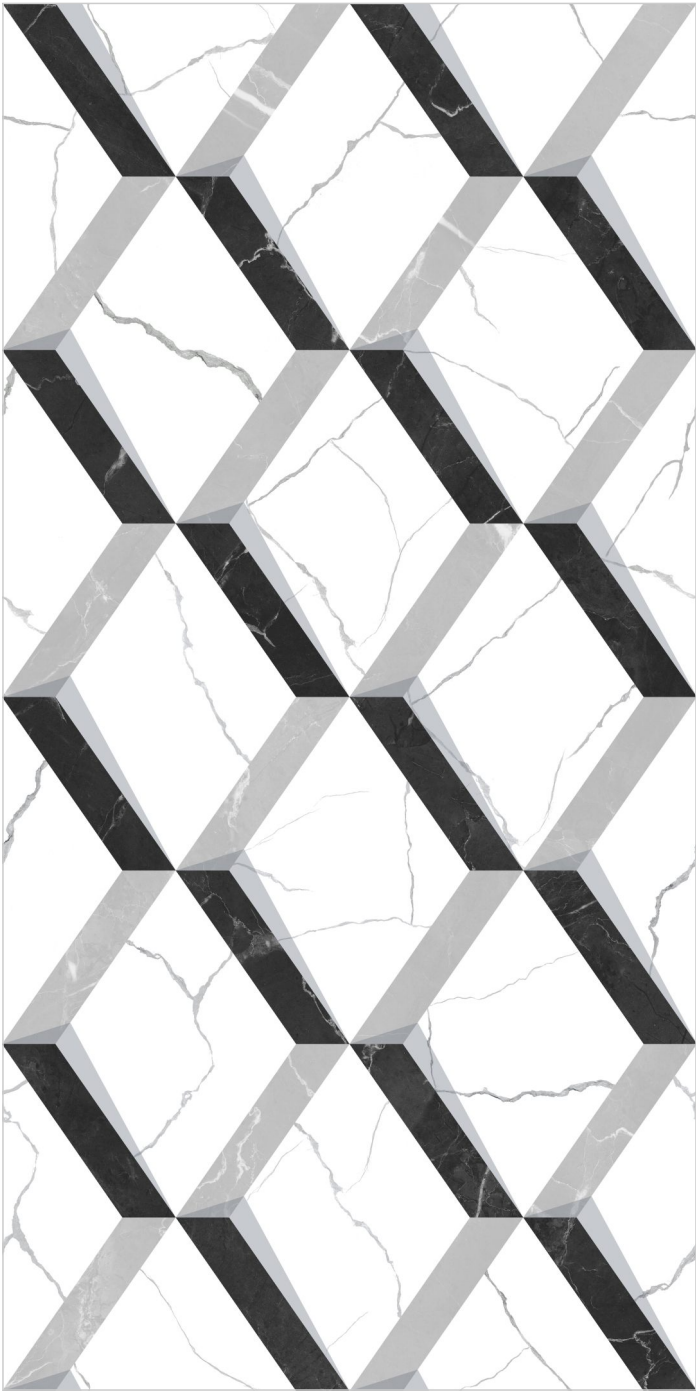

TILES IN FRAME :
1605

SURFACE :
POLISHED

COMPOSITION :
1 PCS.



DIMENSION :
600X1200MM
60X120CM





TILES IN FRAME :
1606

SURFACE :
POLISHED

COMPOSITION :
1 PCS.



DIMENSION :
600X1200MM
60X120CM





TILES IN FRAME :
1607

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM





TILES IN FRAME :
1608

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



TILES IN FRAME :
1609

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



TILES IN FRAME :
1610
SURFACE :
POLISHED
COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM






TILES IN FRAME :
1611
SURFACE :
POLISHED
COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM

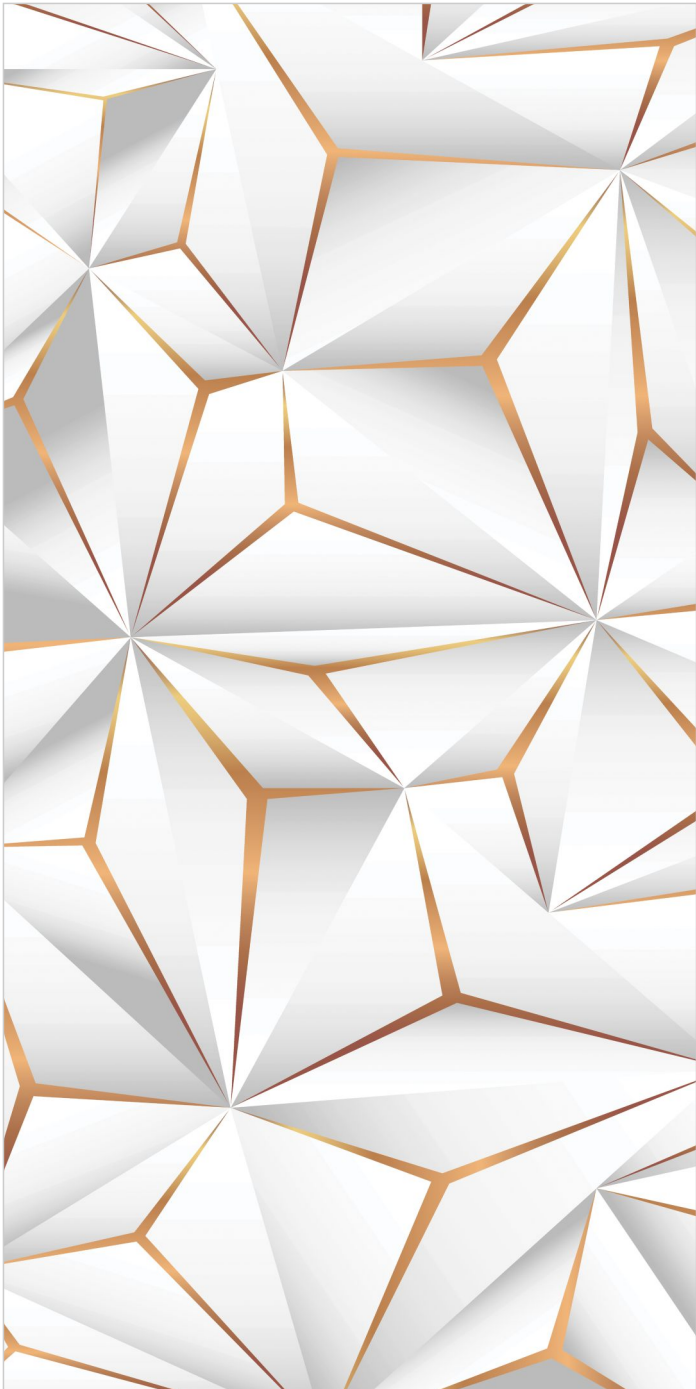

TILES IN FRAME :
1612
SURFACE :
POLISHED
COMPOSITION :
4 PCS.



DIMENSION :
600X1200MM
60X120CM

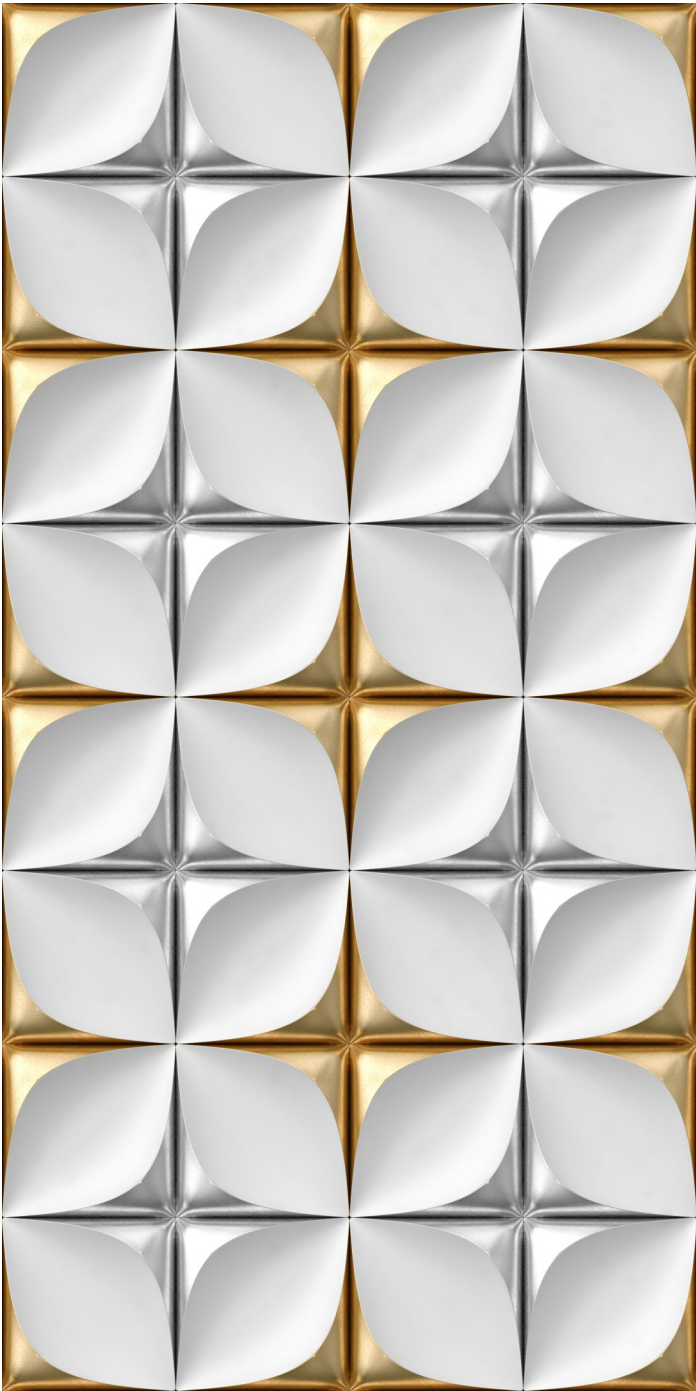THREED
COLLECTION

TILES IN FRAME :
1613
SURFACE :
POLISHED
COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM



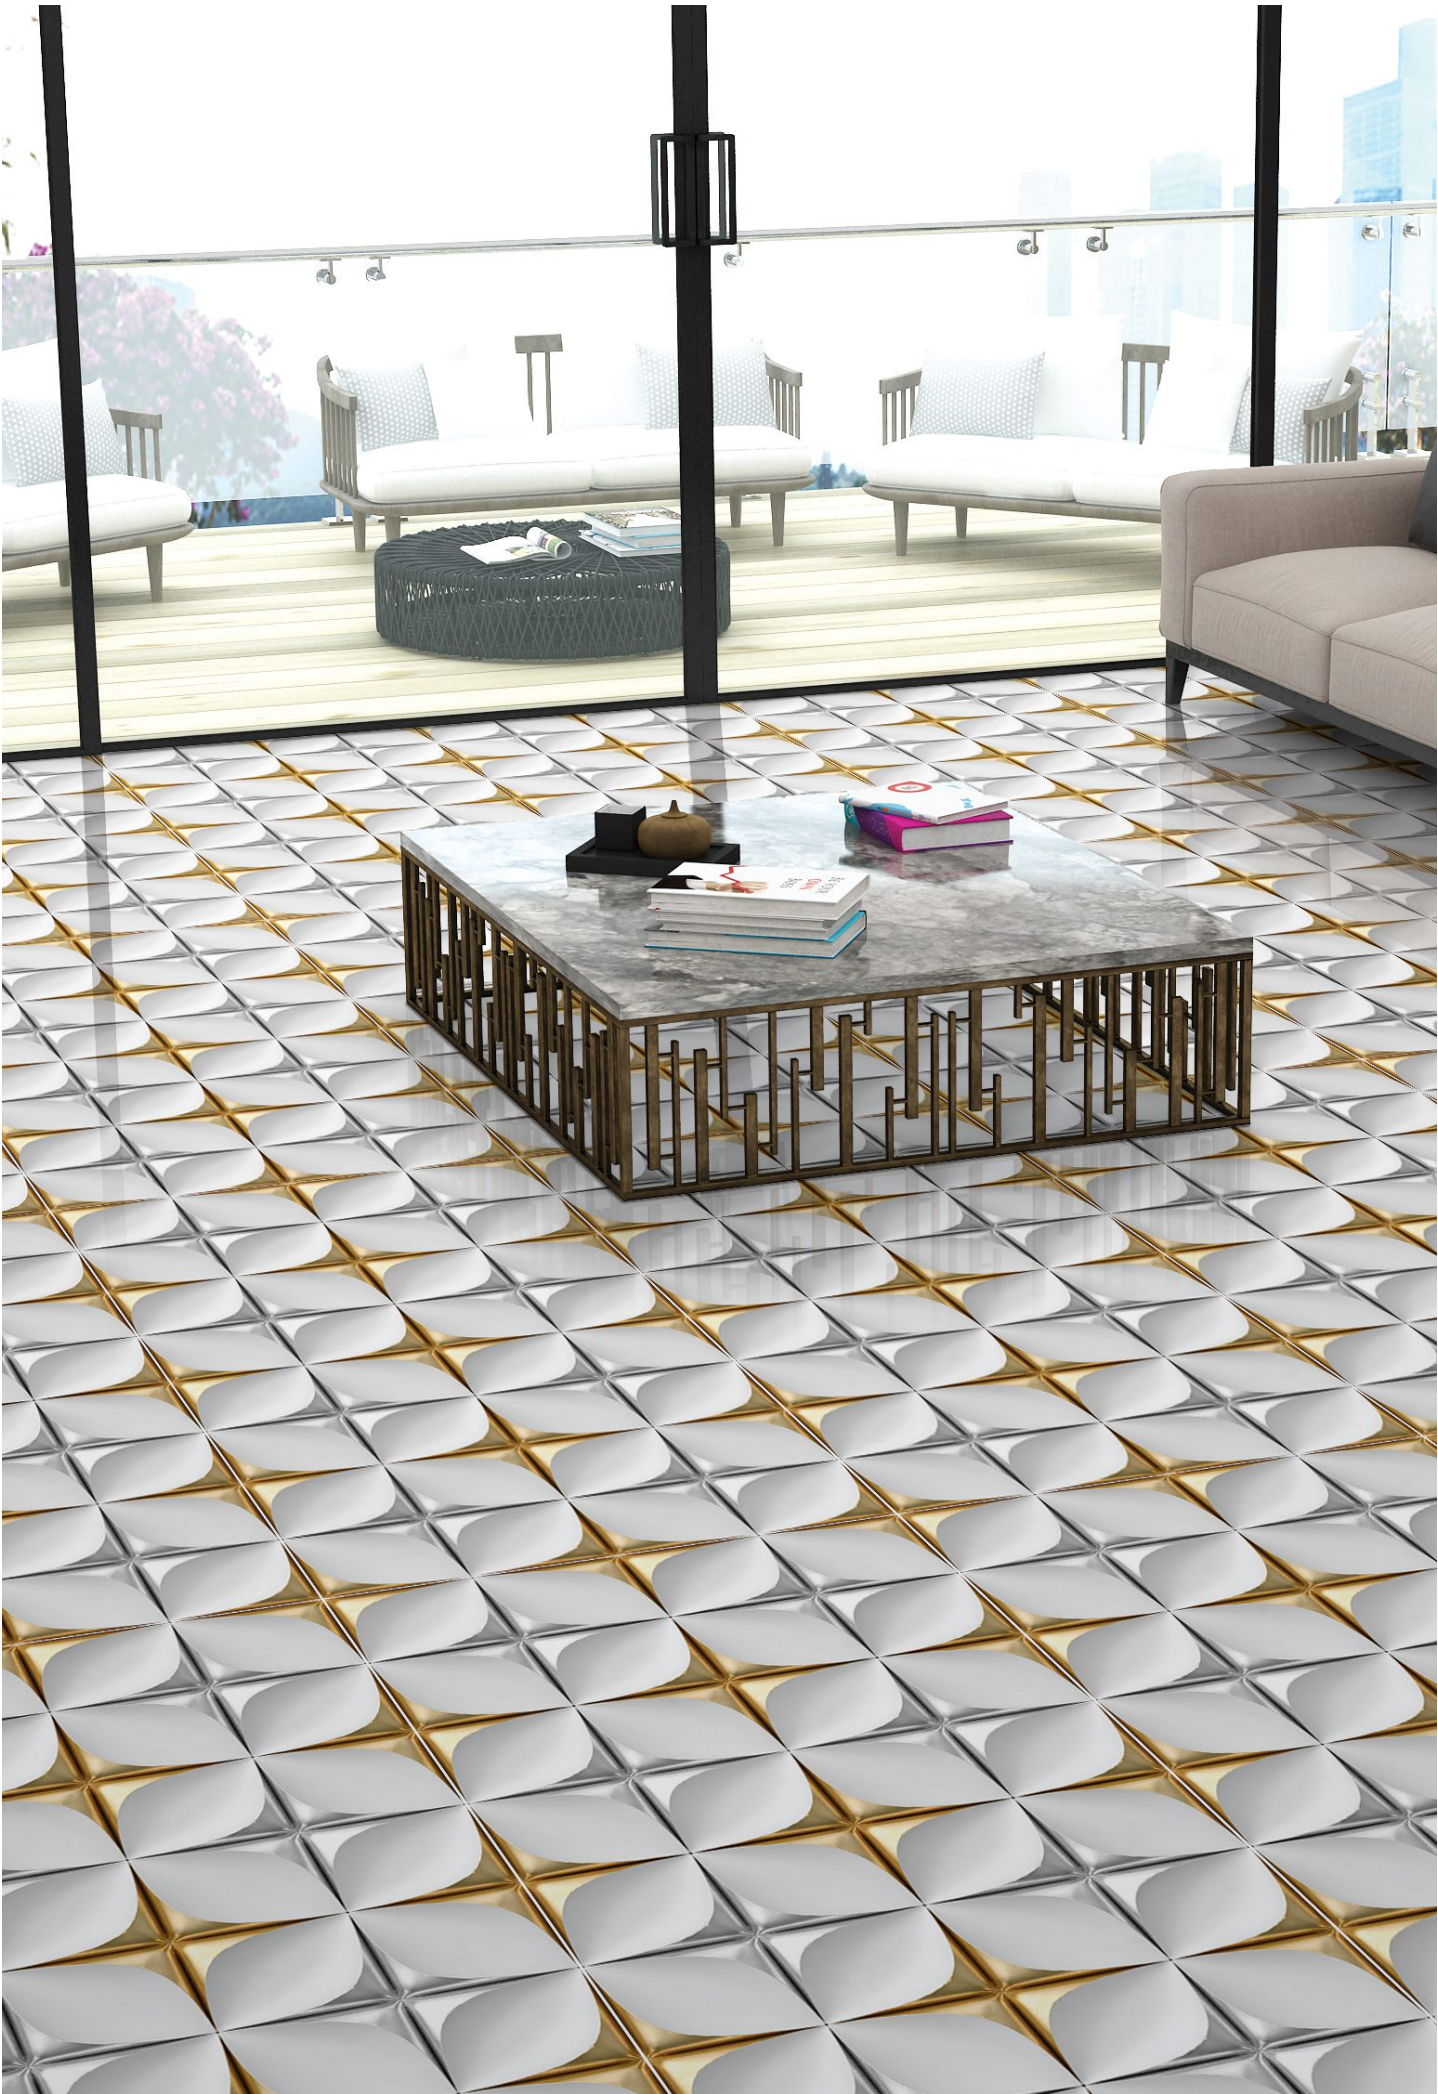


TILES IN FRAME :
1614
SURFACE :
POLISHED
COMPOSITION :
1 PCS.




DIMENSION :
600X1200MM
60X120CM



TILES IN FRAME :
1615
SURFACE :
POLISHED
COMPOSITION :
1 PCS.




DIMENSION :
600X1200MM
60X120CM

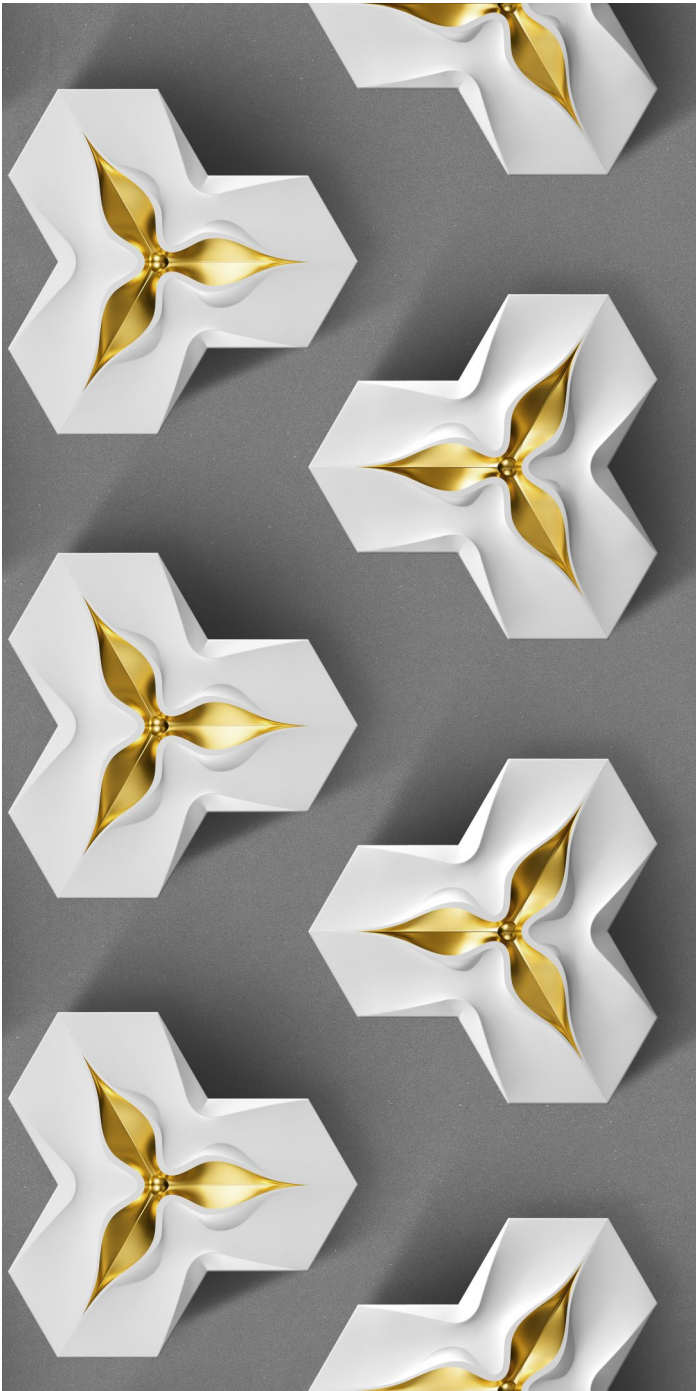

TILES IN FRAME :
1616
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



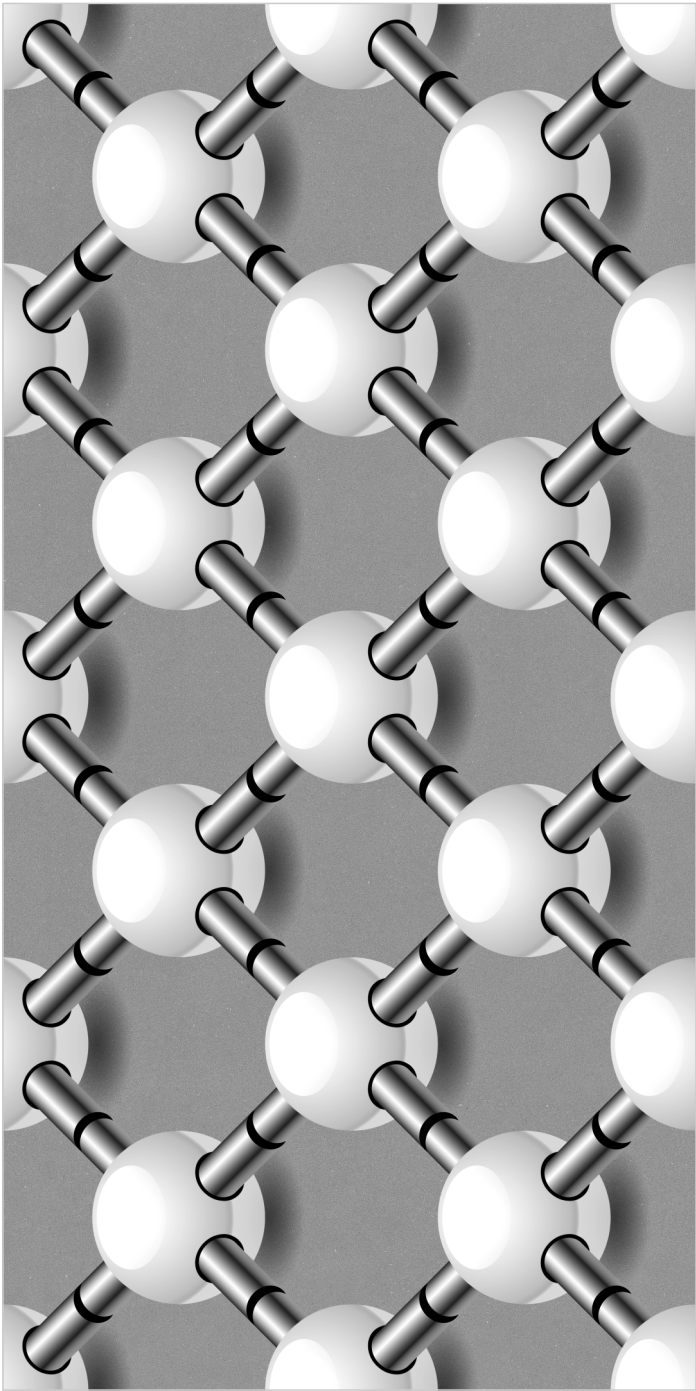


TILES IN FRAME :
1617

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

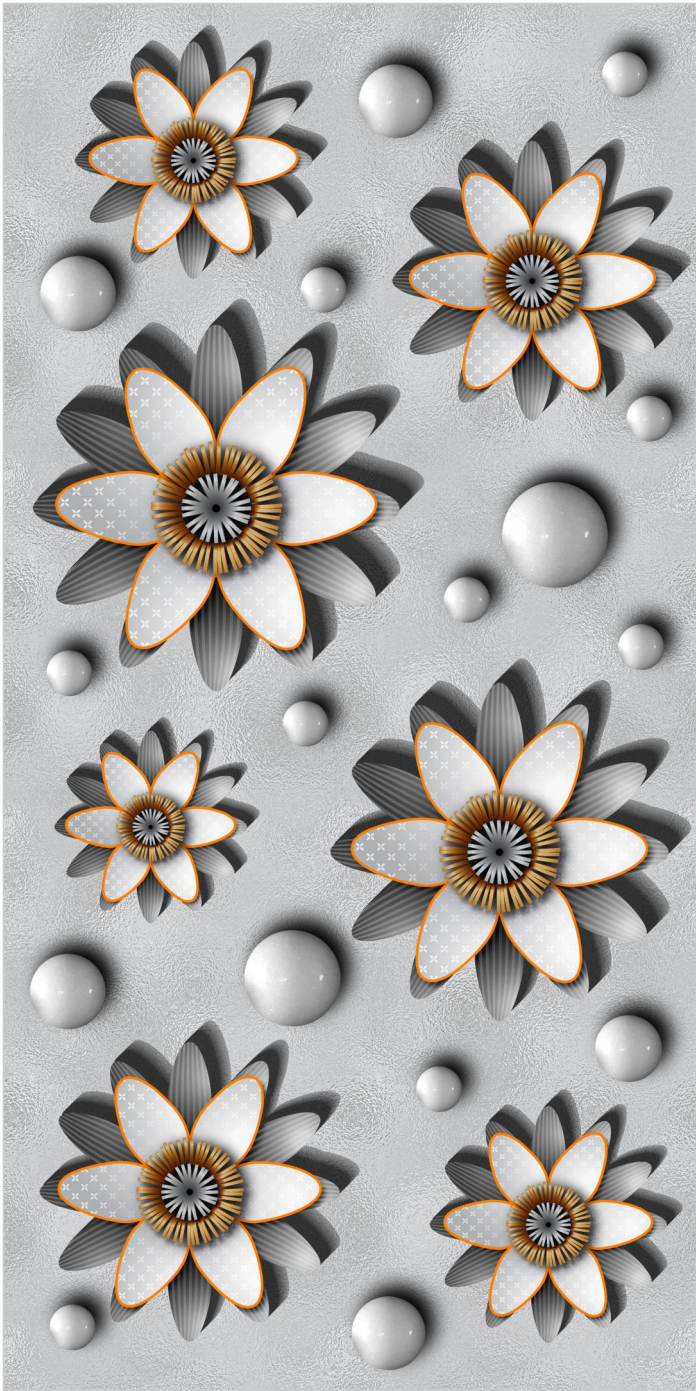

TILES IN FRAME :
1618

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



THREED
COLLECTION

TILES IN FRAME :
1619
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM






TILES IN FRAME :
1620

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

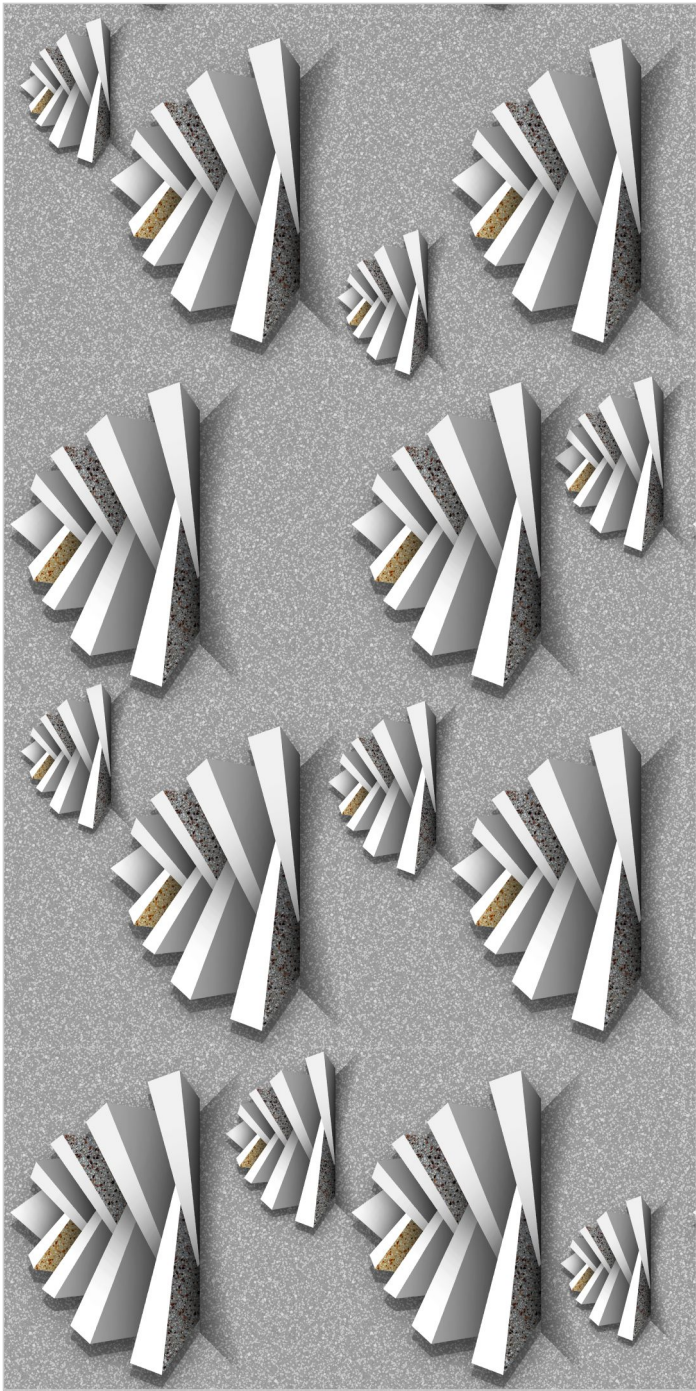


TILES IN FRAME :
1621

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

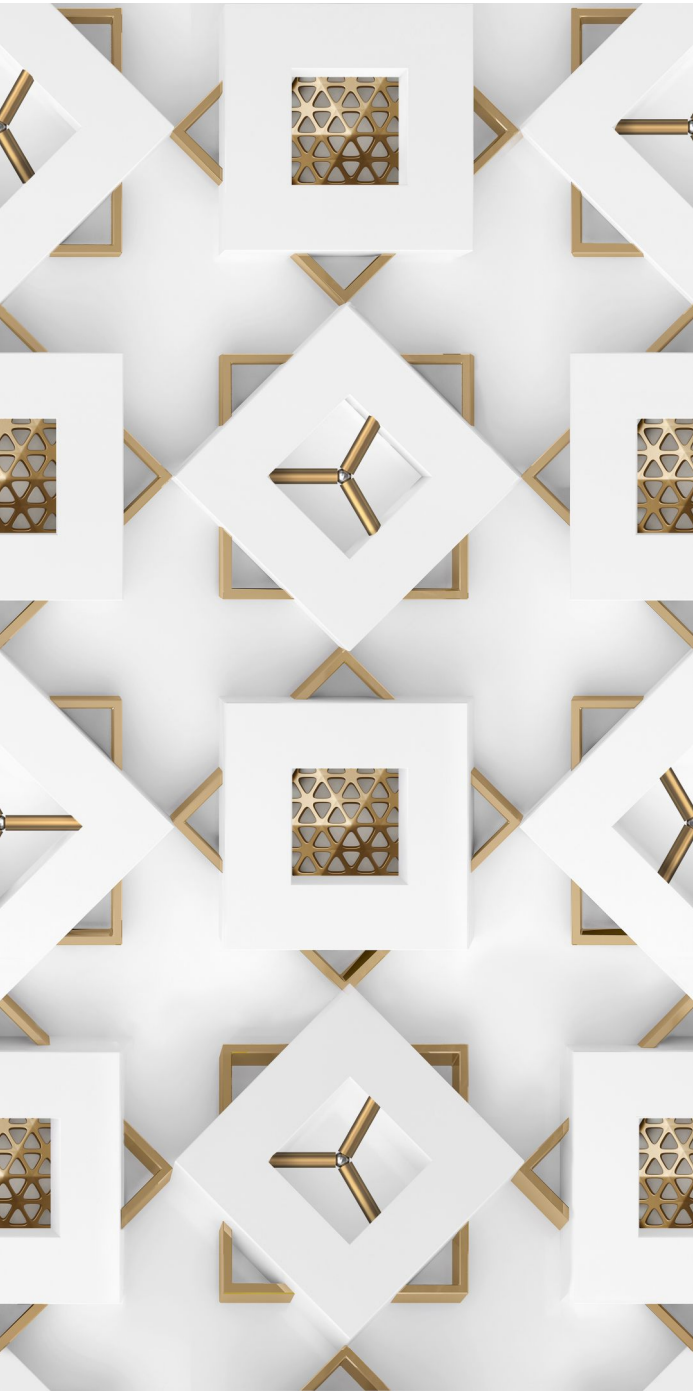


THREED
COLLECTION

TILES IN FRAME :
1622
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

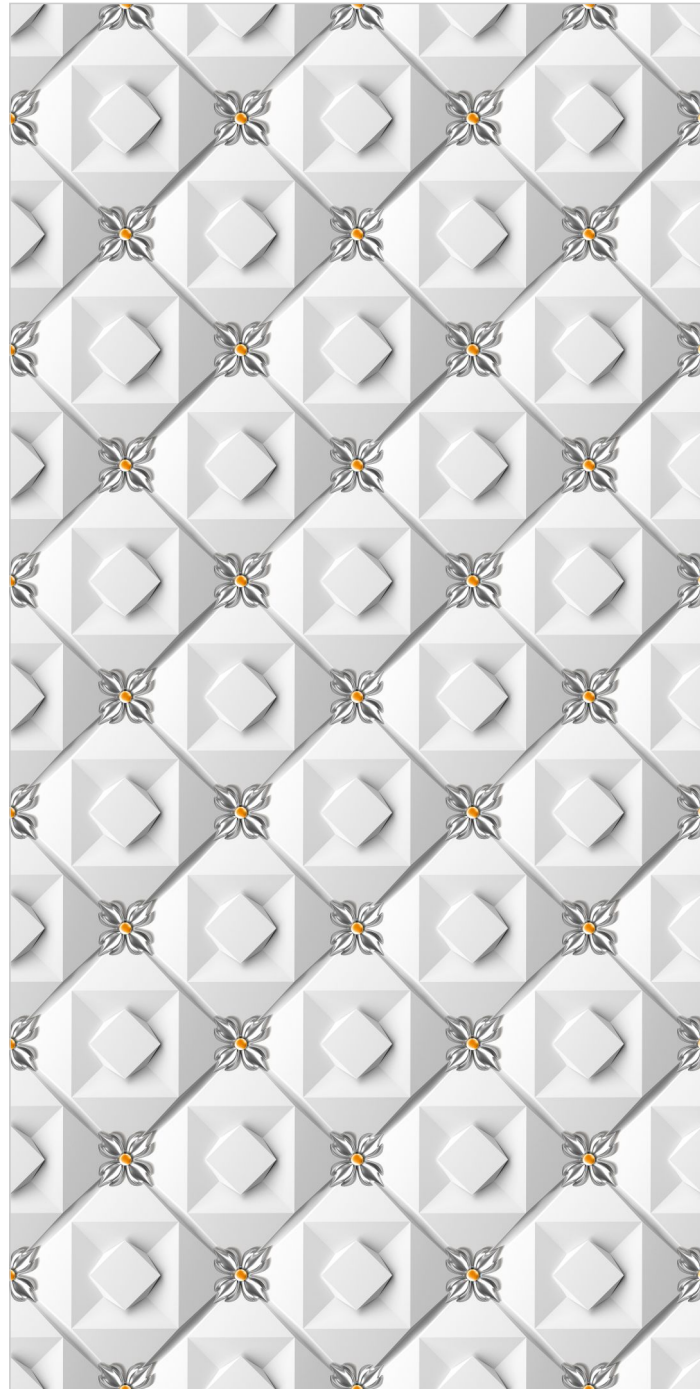


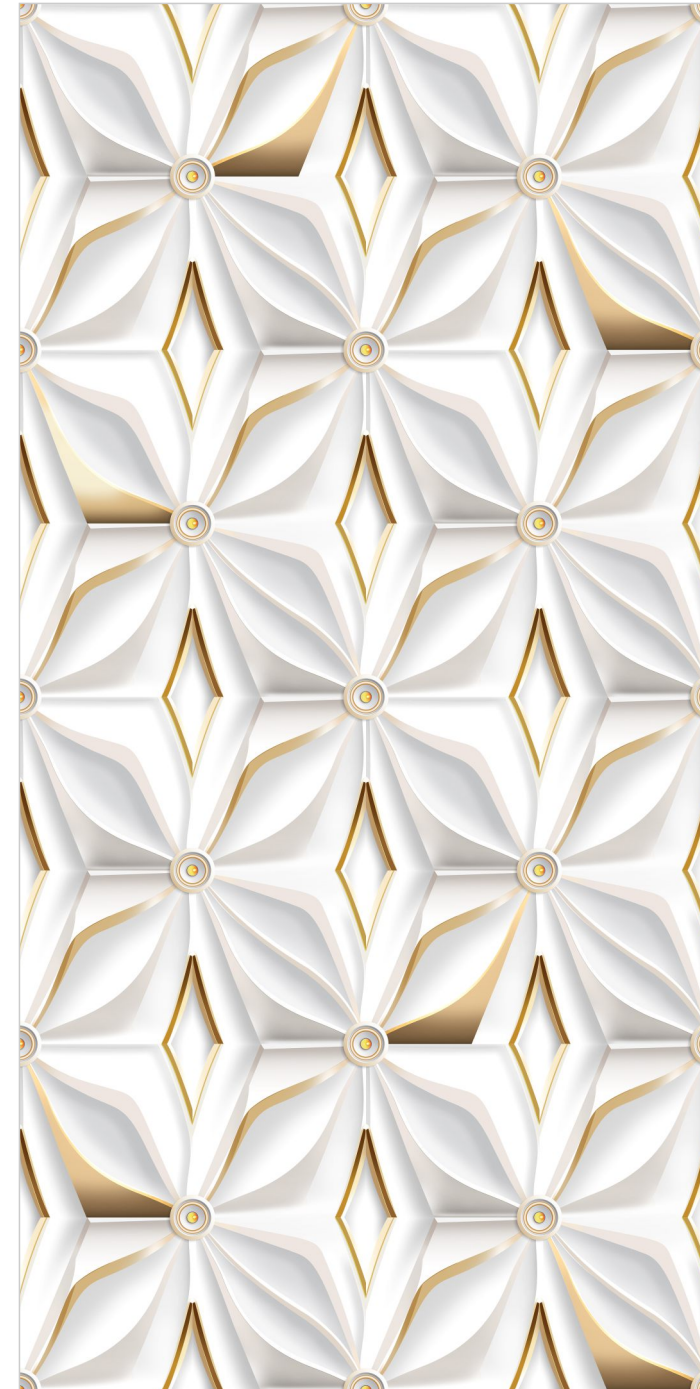


TILES IN FRAME :
1623

SURFACE :
POLISHED

COMPOSITION :
1 PCS.




DIMENSION :
600X1200MM
60X120CM




TILES IN FRAME :
1624

SURFACE :
POLISHED

COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM






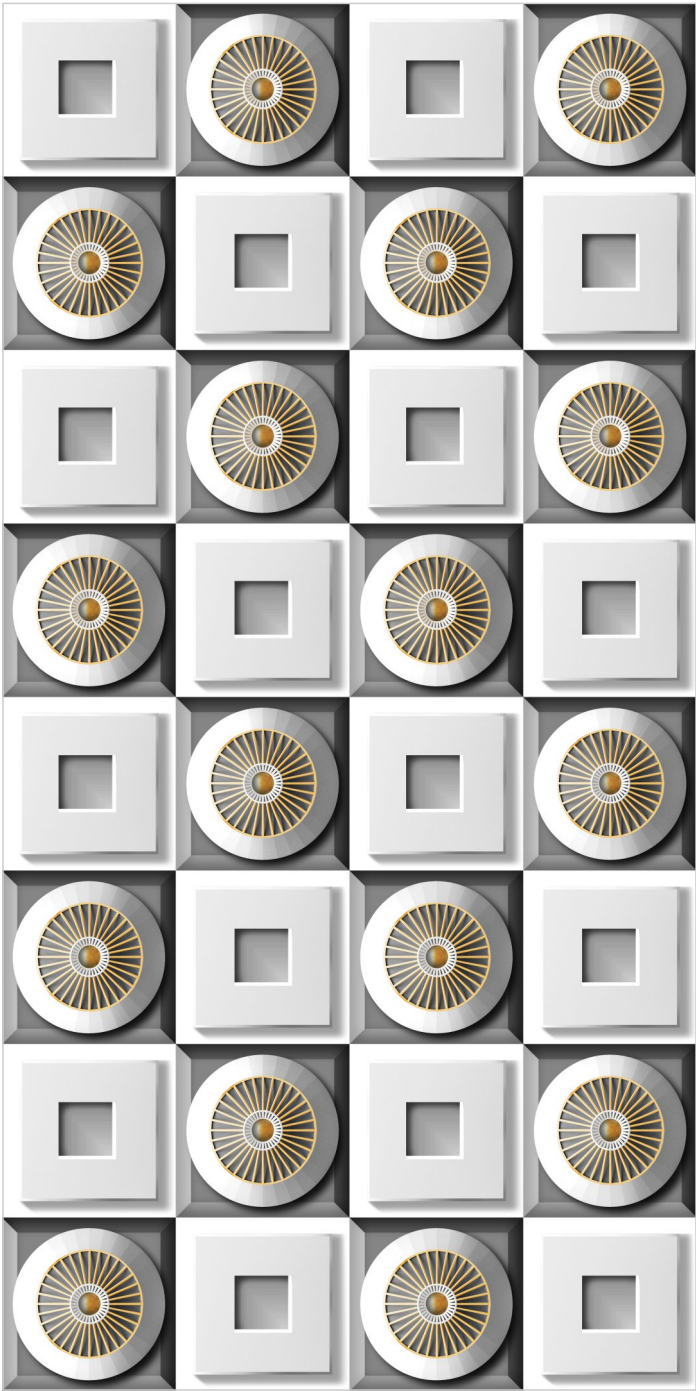
TILES IN FRAME :
1625

SURFACE :
POLISHED

COMPOSITION :
1 PCS.


DIMENSION :
600X1200MM
60X120CM






TILES IN FRAME :
1626
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

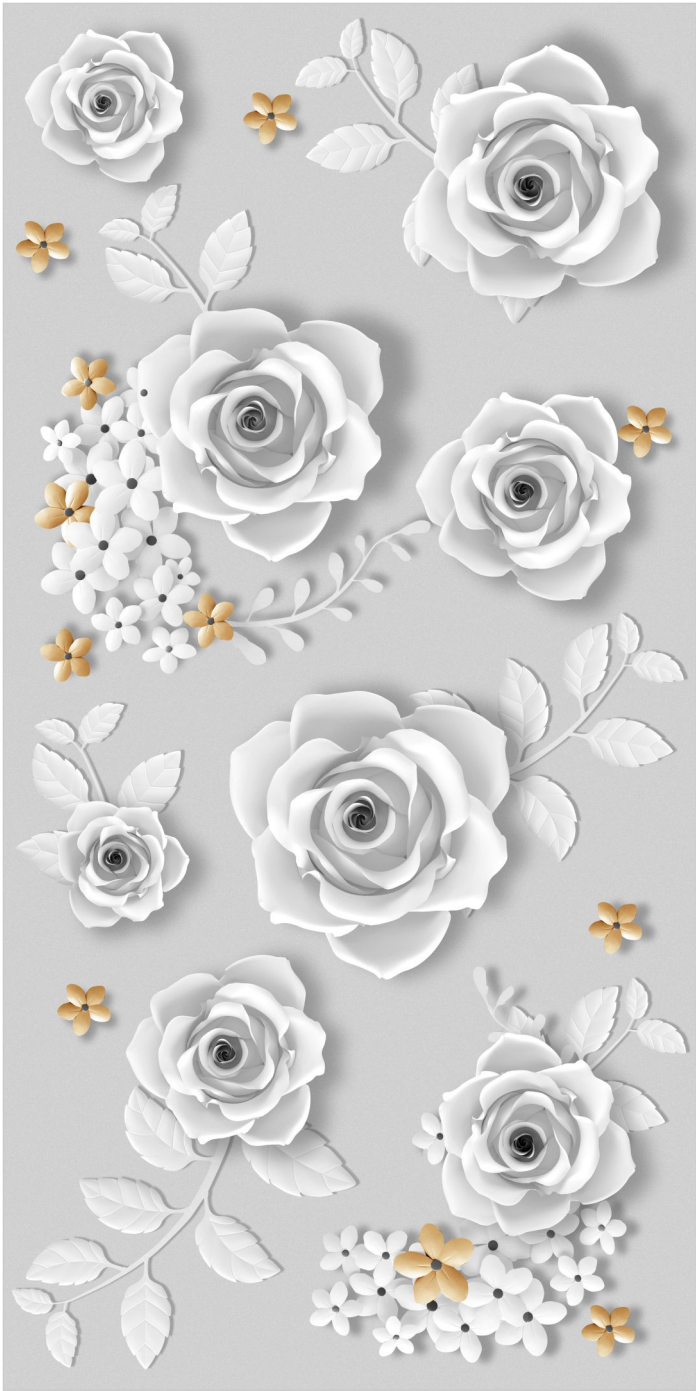

TILES IN FRAME :
1627
SURFACE :
POLISHED
COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

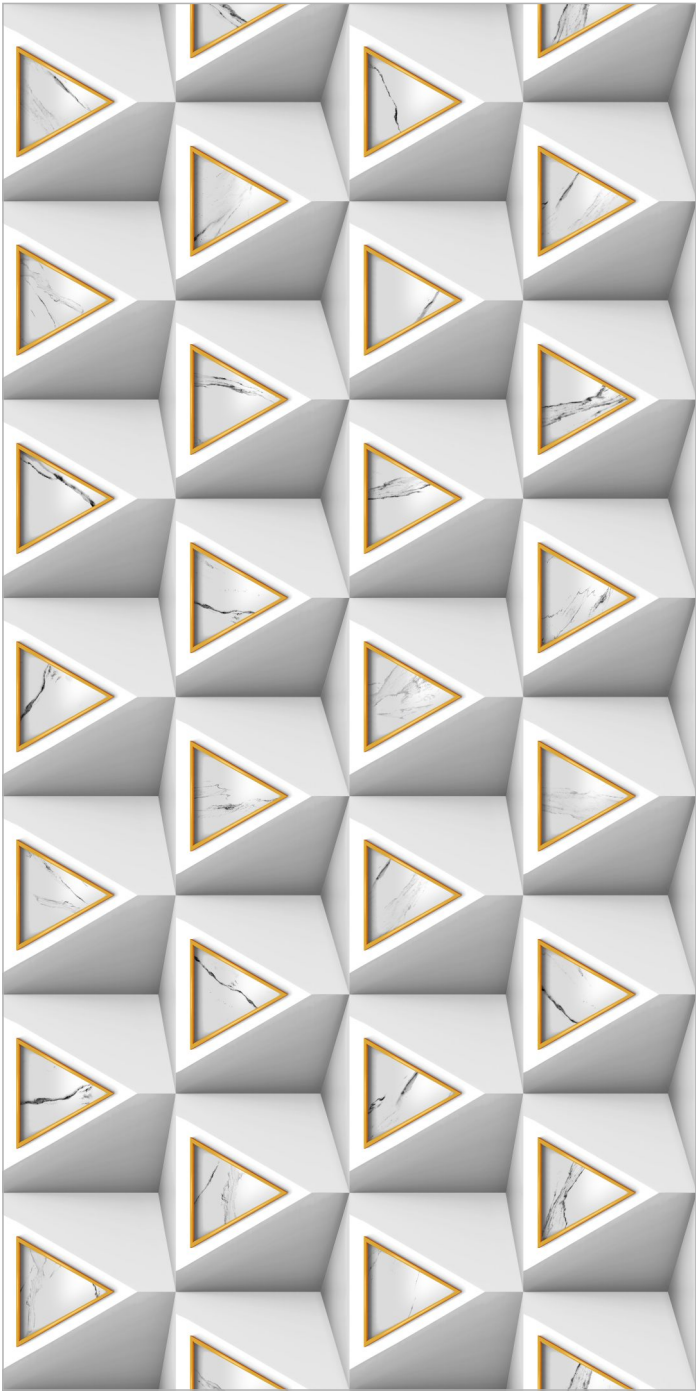

TILES IN FRAME :
1628
SURFACE :
POLISHED
COMPOSITION :
1 PCS.



DIMENSION :
600X1200MM
60X120CM






TILES IN FRAME :
1629

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM

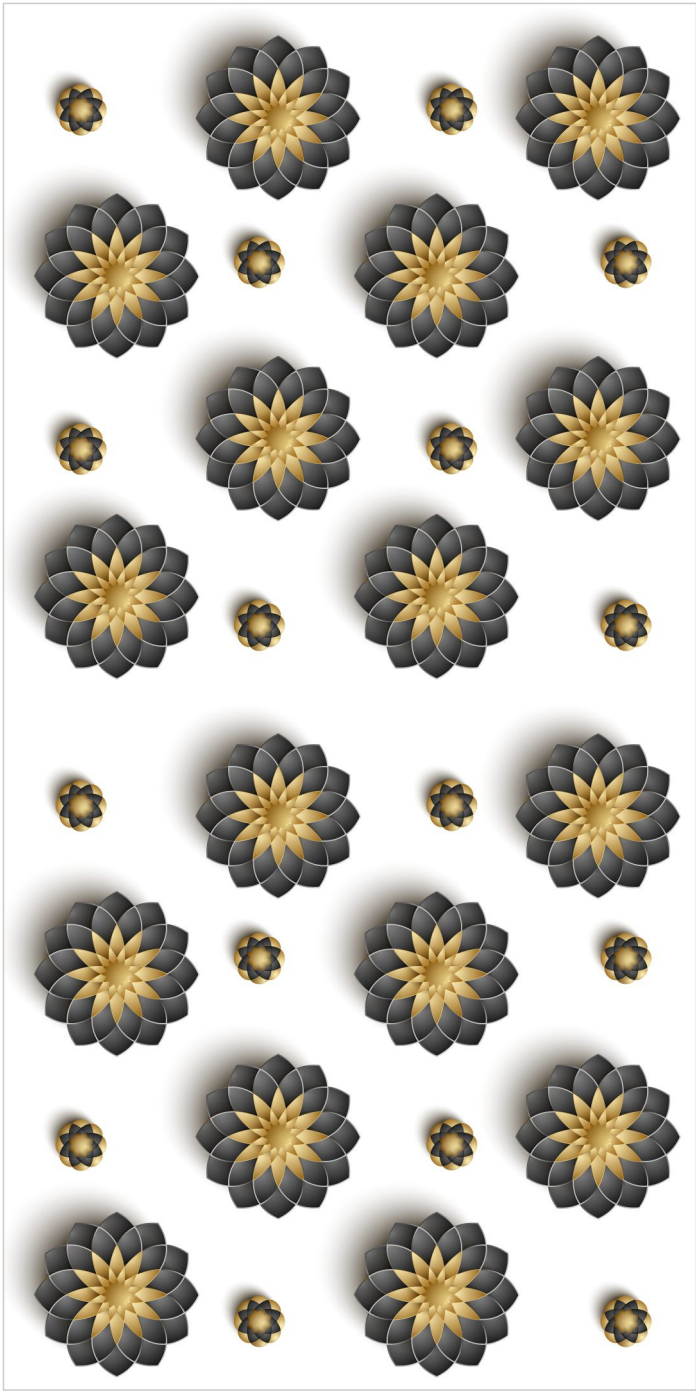

TILES IN FRAME :
1630

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



TILES IN FRAME :
1631

SURFACE :
POLISHED

COMPOSITION :
1 PCS.

DIMENSION :
600X1200MM
60X120CM



TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.BIa	MEAN VALUE OF SKYPE	TEST METHOD
Regulatory Properties			
Deviation in length and width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10 %	ISO 10545-2
Surface flatness central curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness edge curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface flatness warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(For Plain Color)	ΔE <1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value > 90	Glossmeter 60°
Glossiness (Matt)	as per mfg.	3° < GLOSS < 7°	Glossmeter 60°
Glossiness (satin/Posh)	as per mfg.	7° < GLOSS < 18°	Glossmeter 60°
Structural Properties			
Water absorption	0.50 % ≤ Ev ≤ 3.00 %	0.060 % ≤ Ev ≤ 3.00 %	ISO 10545-3
Bulk density	as per mfg.	> 2.28 gm/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 30.0 N/mm²	Min. 35.0 N/mm²	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1100.0 N	Min. 1300.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(For ≥15mm)	Min. 1100.0 N	Min. 1800.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness	as per mfg.	Polished Min 4* / Satin,Posh & Matt Min 6	BS EN 15771
Surface abrasion resistance	as per mfg.	Polish Min. Class 2, Satin & Posh Min. Class 3, & Matt Min. Class 4	ISO 10545-7
Deep abrasion resistance	Max. 175mm ³	Max. 132mm ³	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR)	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis unglazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance (COF-WET PENDULAM)##	as per mfg.	Glossy P0(<12),Satin, Posh ≥P1(12-24) Matt ≥P2(25-34)	BS 7976-2
Slip resistance - (Satin / Matt (DCOF) (R value)##	as per mfg.	R9 to R13**	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT
GVT-PGVT	600x 1200mm	9mm	2 pcs.	1.44 sq. mtr.	27 KG (APPROX)





SKYPE TILE LLP

Jetpar - Pipli Road, Opp. Blackberry Tiles,
At: Shapar, Morbi, Gujarat, 363642

Email

info@skypetile.com

Website

info@skypetile.com

Contact

+91 99259 22227